


N300

RE3000W
Wi-Fi® RANGE EXTENDER

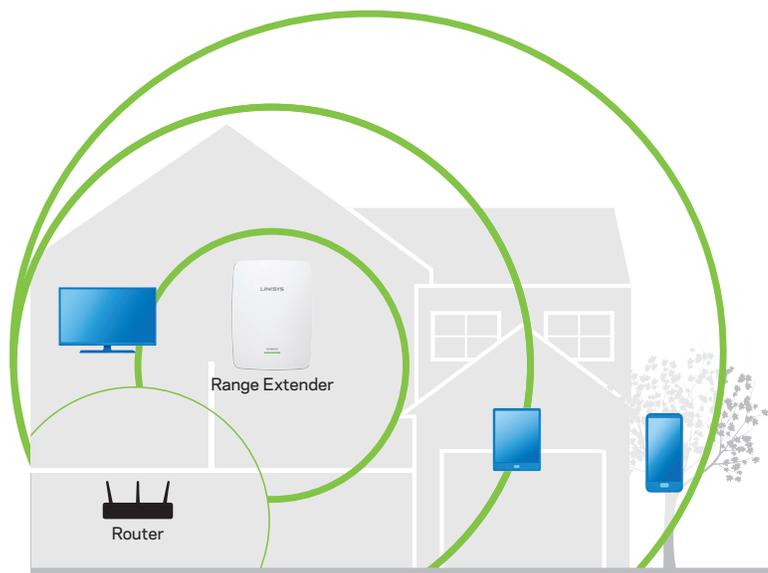

Plug directly into wall
or use adapter for
tabletop placement.

The Linksys N300 Wi-Fi Range Extender extends your Wi-Fi signal to eliminate dead spots and increases the wireless range in your home.

Numerous factors can affect the signal strength from a high-performance router to certain areas of your home. Building materials as well as interference from appliances and even a house's structure can hinder Wi-Fi coverage.

The Linksys N300 Wi-Fi Range Extender boosts the Wi-Fi signal to those hard-to-reach places and also features an Ethernet port to supply Internet access to wired devices—from any appropriately located, active power outlet.

Key Features and Benefits

- **Universal Compatibility**
Wireless-N technology is compatible with all a/b/g/n devices
Works with any router or gateway including routers supplied by a service provider*
- **Fast Ethernet Port**
Delivers a strong wired connection
- **Easy Setup**
Installation wizard provides easy installation and directs optimal placement
Push-Button Security WPS* makes adding devices simple and secure
- **QoS**
Prioritizes bandwidth for smoother media streaming

N300

RE3000W Wi-Fi® RANGE EXTENDER



PACKAGE CONTENTS

- Linksys N300 Wi-Fi Range Extender, RE3000W
- CD-ROM with Setup Software and Resources
- AC Power Cord
- AC Power Connector Cover
- Ethernet Cable
- Quick Installation Guide

MINIMUM SYSTEM REQUIREMENTS

PC or other devices with Ethernet network port
AC power outlets
PC/Mac® with CD-ROM for utility or Wi-Fi Protected Setup™
enabled router

Specifications are subject to change without notice.

An active, customer-purchased Internet Service Provider
broadband account is required for connection to the Internet.

Wireless Security:

Wi-Fi Protected Setup™ button
WPA®/WPA2® encryption
SPI firewall
WEP encryption

Electrical Specifications

Input: 100-240V ~0.5A, 50/60Hz

Radio Specifications

Frequency Band: 2412-2472 MHz
Peak antenna gain: 2.8dBi
Antenna type: Internal PIFA
Transmitted Power (EIRP power):
19.90dBm (Measured Max. Average)

Ports:

1 Fast Ethernet, C7 connector
for localized AC cable or clip

2-Year Limited Warranty

Product Weight (kg): 0.16
Product Depth (cm): 15.19
Product Width (cm): 9.19
Product Height (cm): 3.30
Unit Weight (kg): 0.12
Unit Depth (cm): 3.31
Unit Width (cm): 20.29
Unit Height (cm): 8.26
Case Pack Quantity (*PL) 24
Case Pack Weight (kg) (*PL): 0.98
Case Pack Length (cm) (*PL): 45.97
Case Pack Width (cm) (*PL): 30.04
Case Pack Height (cm) (*PL): 45.21

*Maximum performance derived from IEEE Standard 802.11 specification. Actual performance can vary, including lower wireless network capacity, data throughput rate, range and coverage. Performance depends on many factors, conditions and variables, including distance from the access point, volume of network traffic, building materials and construction, operating system used, mix of wireless products used, interference and other adverse conditions.

†Secure push-button setup works with devices that support Wi-Fi Protected Setup™ like Linksys E-Series routers and others.



Part Number	Description	UPC	Case Pack UPC	EAN	Warranty
RE3000W-ME	N300 Wi-Fi RANGE EXTENDER	745883654574	10745883654571	4260184664672	2-Year Limited Warranty

linksys.com

Linksys LLC
Tupolevlaan 1, 1119 NW Schiphol-Rijk, Holland
Made in Taiwan