

To install the Switch, you will need the following:



OmniView Secure DVI Dual-Link KVM Switch (included)




5V DC, 3A Global Power Adapter* (included)



Belkin DVI/USB KVM Cable Kits (F1D9201-XX**) – 1 per computer



DVI Monitor



USB Keyboard



USB Mouse

*Includes interchangeable AC plugs for the U.S., U.K., Europe, and Australia.

**XX = cable length in feet

Introduction


This Quick Installation Guide will guide you through the steps needed to install the OmniView Secure DVI Dual-Link KVM Switch (the Switch). If you have any problems during this installation, please refer to the User Manual.

Step 1

Connect the Console to the Switch

NOTE: Before you begin, make sure that all computer equipment and devices are powered off, and that your USB keyboard and mouse work properly with all your computers.


- 1.1 Connect your monitor to the DVI port on the back of the Switch in the “User Console” section.
- 1.2 Connect your keyboard and mouse to the USB ports on the back of the Switch in the “User Console” section.
- 1.3 Connect your speaker and microphone cables into the corresponding ports in the “User Console” section.

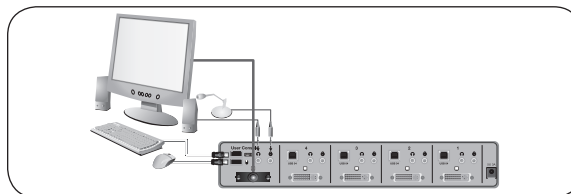

Step 2

Connect Computers to the Switch

- 2.1 Make sure all computers and the Switch are powered off.
- 2.2 Using the Belkin DVI/USB KVM Cable Kit (F1D9201-XX), connect the male DVI connector to the monitor port on your computer. Then, connect the other end of the cable into an available port on the Switch. (Refer to diagram below)
- 2.3 Using the Cable Kit, connect the USB Type-A connector to an available USB port on your computer. Then, connect the USB Type-B connector to the corresponding USB port on the Switch. (Refer to diagram below)
- 2.4 Connect the two audio cables (audio and microphone) to your computer. Then, connect the other end to the corresponding audio and microphone port on the Switch.

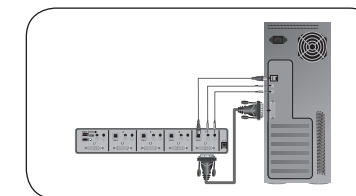


- 2.5 Repeat the steps above for each additional USB computer you wish to connect.

Step 3

Powering Up the Systems

3.1 Power on the monitor.

3.2 Attach the power adapter to the DC power jack labeled “5V, 3A” on the back of the Switch. Only use the power adapter supplied with the Switch.

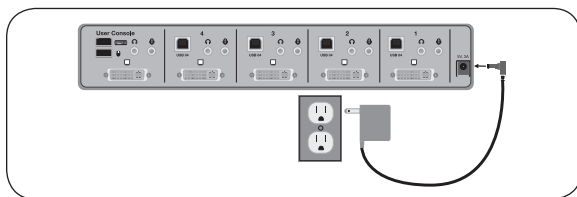

3.3 Power on your computers. All computers can be powered on simultaneously.

You are now ready to use the Switch. Please refer to your User Manual for additional information.

BELKIN®

**OmniView® Secure DVI
Dual-Link KVM Switch**

BELKIN®

**OmniView® Secure DVI
Dual-Link KVM Switch**

BELKIN®

www.belkin.com

Belkin Tech Support

US: 800-223-5546 ext. 2263

310-898-1100 ext. 2263

UK: 0845 607 77 87

Australia: 1800 235 546

New Zealand: 0800 235 546

Singapore: 65 64857620

Europe: www.belkin.com/support

Belkin International, Inc.

501 West Walnut Street

Los Angeles, CA 90220, USA

310-898-1100

310-898-1111 fax

Belkin Ltd.

Express Business Park, Shipton Way

Rushden, NN10 6GL, United Kingdom

+44 (0) 1933 35 2000

+44 (0) 1933 31 2000 fax

Belkin B.V.

Boeing Avenue 333

1119 PH Schiphol-Rijk, The Netherlands

+31 (0) 20 654 7300

+31 (0) 20 654 7349 fax

Belkin Ltd.

4 Pioneer Avenue

Tuggerah Business Park

Tuggerah, NSW 2259, Australia

+61 (0) 2 4350 4600

+61 (0) 2 4350 4700 fax



© 2008 Belkin International, Inc. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.

PM00506

Quick Installation Guide